





DESCRIPTIONS 描述

- MA1006 铝制单点称重传感器可以满足 0.3kg-3kg 量程范围内的精确称量
- 硅橡胶密封, 表面阳极化, 防腐性能佳
- 平行梁结构, 安装使用方便
- 适用于计价秤, 平台秤等各类电子称重设备
- 推荐秤台尺寸: 200*200mm
- MA1006 aluminum-alloy single point load cell can meet the accurate weighing in the capacity of 0.3kg-3 kg
- Silicone rubber seal, colourless anodized, and good corrosion resistance
- Parallel beam structure, easy to install
- Suitable for pricing scales, bench scales, etc.
- Recommended platform size: 200 x 200 mm

DIMENSIONS 尺寸

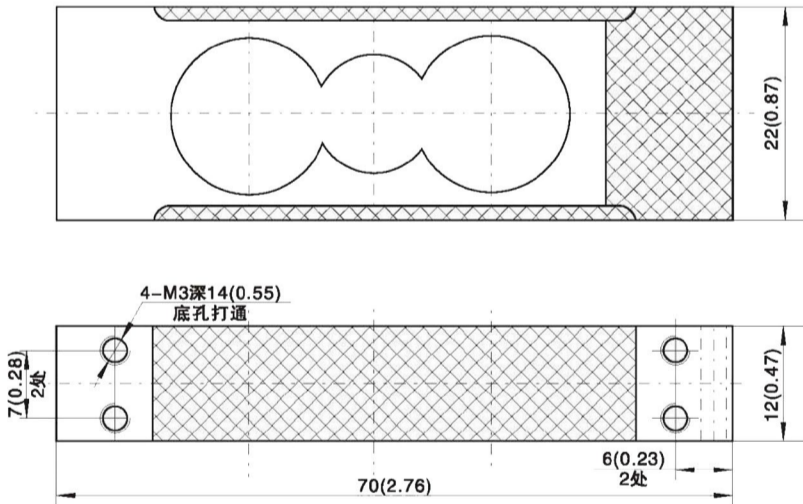

接线方式 Schematic

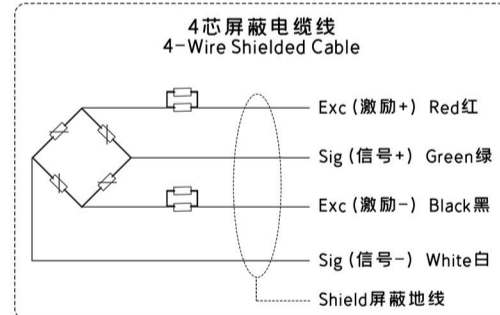

SPECIFICATION 参数

额定载荷	kg	0.3/0.5/0.6/1/3
输出灵敏度	mV/V	1.0±0.1
精度		C3
综合误差	(%FS)	±0.02
蠕变/回零 (30分钟)	(%FS)	±0.0167
温度对输出灵敏度的影响	(%FS/10℃)	±0.0175
温度对零点输出的影响	(%FS/10℃)	±0.02
零点输出	(%FS)	≤ ±2
温度补偿范围	(℃)	-10 ~ 40
允许使用温度范围	(℃)	-35 ~ +65
输入阻抗	(Ω)	406±6
输出阻抗	(Ω)	350±3
绝缘阻抗	(MΩ)	≥5000 (50VDC)
推荐激励电压	(V)	5 ~ 12(DC)
最大激励电压	(V)	18(DC)
安全过载范围	(%FS)	120
极限过载范围	(%FS)	150
防护等级		IP65
电缆线规格	mm	φ2.9
电缆线长度	m	0.45
推荐秤台尺寸	mm	200×200
四角误差		0.02%加载值/100mm
推荐安装扭矩	N.m	5